


PROFINET *Type A Industrial Ethernet Cat 5e* DataGuard® Armoured (SWA) PVC

Cable Design

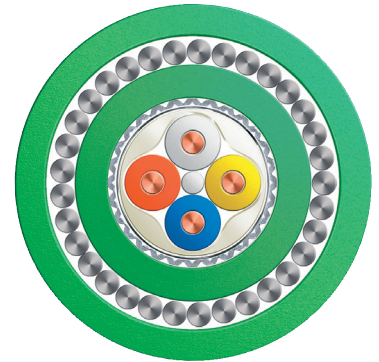

Wire

Conductor	Solid bare copper wire (22awg)	Ø 0,64 mm
Insulation	Polyethylene (PE)	Ø 1,50 mm


Core

Central Element	Filler	
1° Layer	4 wires twisted (WH-YE-BU-OG)	
Tape	Plastic tape overlapped	
Easystrip Jacket	Soft Polyvinylchloride (PVC)	Ø 3,90 mm
Screen	Alulaminat foil overlapped	
Braid	Tinned copper wire braid, 90% coverage	Ø 4,50 mm

Inner Jacket	Polyvinylchloride (PVC), Green	Ø 6,5 ± 0,20 mm
---------------------	--------------------------------	-----------------

Armour	DataGuard® Steel Wire Armour (DSWA)	
---------------	-------------------------------------	--

Outer Jacket	Polyvinylchloride (PVC), Green	Ø 11,0 ± 0,50 mm
---------------------	--------------------------------	------------------

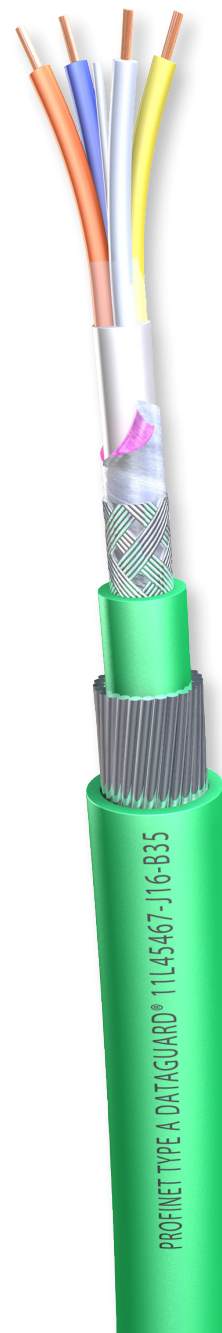

Characteristics

- Indoor/Outdoor applications
- Mechanical protection
- Rodent Protection
- Direct Burial
- UV-Stable and colourfast

Specification

Part Number	Type
11L45467-J16-B35	Industrial Ethernet Cat5e ES, PROFINET cable for permanent installation, 2x2x22AWG 1, UL listed: CMG and PLTC and ITC / DataGuard® (SWA) / PVC UV-Stable

PROFINET Type A Industrial Ethernet Cat 5e

DataGuard® Armoured (SWA) PVC

Electrical Data @ 20°C

Loop resistance	≤	115	Ohm/km
Signal run time	≤	5,3	ns/m
Insulation resistance	≥	500	MOhm * km
Characteristic Impedance	1-100 MHz	100±15	Ohm
Surface Transfer Impedance	10 MHz	≤ 10	mOhm/m
Test Voltage (wire/wire/screen rms 50Hz min.)		2000	V

Frequency (MHz)	1	4	10	16	20	31,25	62,5	100
Attenuation typ. Value (dB/100m)	1,6	3,2	5,2	6,9	7,8	10,5	15	19,5
NEXT typ. Value (dB/100m)	80	75	70	65	63	60	55	50

The electrical requirements acc. to EN 50288-2-1.

Mechanical & Thermal Characteristics

Permissible temperature range	-40 ~ +80	°C
Min. Bending radius allowed	10	x Ø (see Ø tolerance)
Weight (approx.)	340	kg/km

Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.